

SawBuddie™

Dustless Technologies®


Installation Instructions

DUST COLLECTION SYSTEM FOR RECIPROCATING SAWS

D2415 SawBuddie Complete Set

INCLUDES:

- A. 1 - D2414 BRISTLED DUST SHROUD
- B. 1 - D2420 VELCRO HOOK & LOOP
- C. 1 - D5150 RELEASABLE TIE
- D. 1 - D5155 18" BLK HOSE

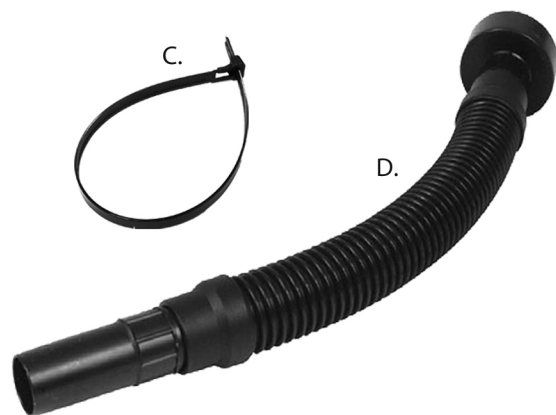

Installation Steps



- 1.** Slip the SawBuddie over the collar of the saw.



- 2.** Attach the velcro belt to secure the SawBuddie around handle grip.



- 3.** Be sure the visibility slot on the SawBuddie is located to allow for blade visibility. Rotate the SawBuddie to accommodate different blade installation.



- 4.** Attach the 1.25" hose to the SawBuddie and turn on vacuum.



- 5.** Secure hose to the electric cord with releasable tie provided.



- 6.** Dust collection is improved with the dust port down.

WARNING! If using this product in the removal of lead paint, asbestos, or other hazardous materials, a Dustless HEPA vacuum must be used. The removal of said materials may generate dust or fumes. Exposure to said materials may cause brain damage or other adverse health effects, especially in young children and pregnant women. Follow all federal, state and local laws including the U.S. Environmental Protection Agency's Renovation, Repair and Painting law or similar law.

Always make sure saw is UNPLUGGED when removing or attaching SawBuddie. Before use, refer to your tool manual for warnings and instructions.

Manual07182E

Dustless®
TECHNOLOGIES

800.568.3949

dustlesstechnologies.com